

CS 110
Computer Architecture
Thread-Level Parallelism (TLP)
and OpenMP Intro

Instructor:
Sören Schwertfeger

<http://shtech.org/courses/ca/>

School of Information Science and Technology SIST

ShanghaiTech University

Slides based on UC Berkley's CS61C

Review

- Amdahl's Law: Serial sections limit speedup
- Flynn Taxonomy
- Intel SSE SIMD Instructions
 - Exploit data-level parallelism in loops
 - One instruction fetch that operates on multiple operands simultaneously
 - 128-bit XMM registers
- SSE Instructions in C
 - Embed the SSE machine instructions directly into C programs through use of intrinsics
 - Achieve efficiency beyond that of optimizing compiler

New-School Machine Structures (It's a bit more complicated!)

Software

Hardware


Warehouse
Scale
Computer

Smart
Phone




- Parallel Requests
Assigned to computer
e.g., Search “Katz”
- Parallel Threads
Assigned to core
e.g., Lookup, Ads
- Parallel Instructions
>1 instruction @ one time
e.g., 5 pipelined instructions
- Parallel Data
>1 data item @ one time
e.g., Add of 4 pairs of words
- Hardware descriptions
All gates @ one time
- Programming Languages

*Harness
Parallelism &
Achieve High
Performance*

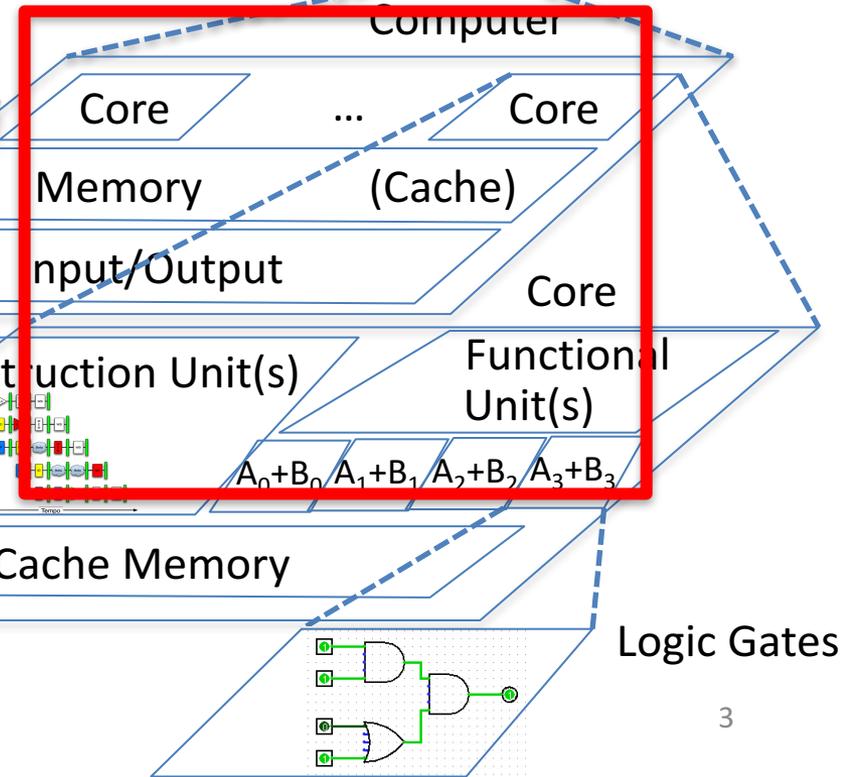

Simple Multiprocessor

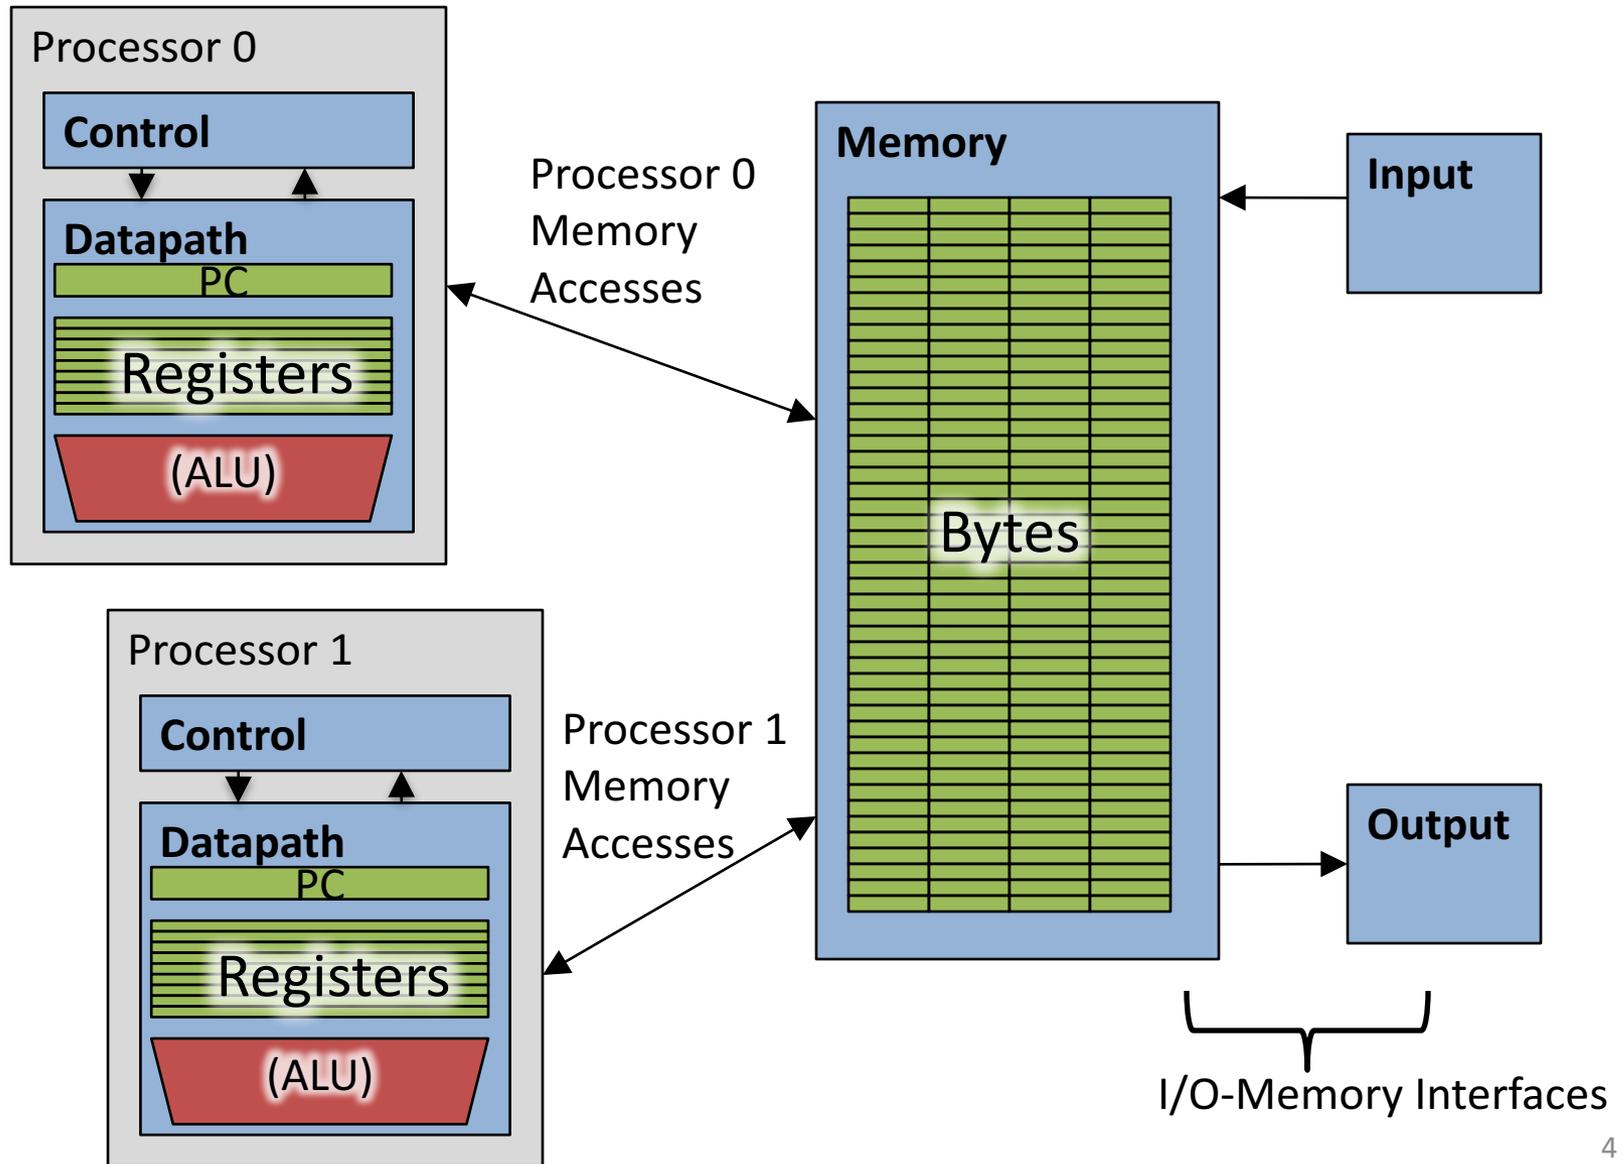


Multiprocessor Execution Model

- Each processor has its own PC and executes an independent stream of instructions (MIMD)
- Different processors can access the same memory space
 - Processors can communicate via shared memory by storing/loading to/from common locations
- Two ways to use a multiprocessor:
 1. Deliver high throughput for independent jobs via job-level parallelism
 2. **Improve the run time of a single program that has been specially crafted to run on a multiprocessor - a parallel-processing program**

Use term *core* for processor (“Multicore”) because “Multiprocessor Microprocessor” too redundant

Transition to Multicore

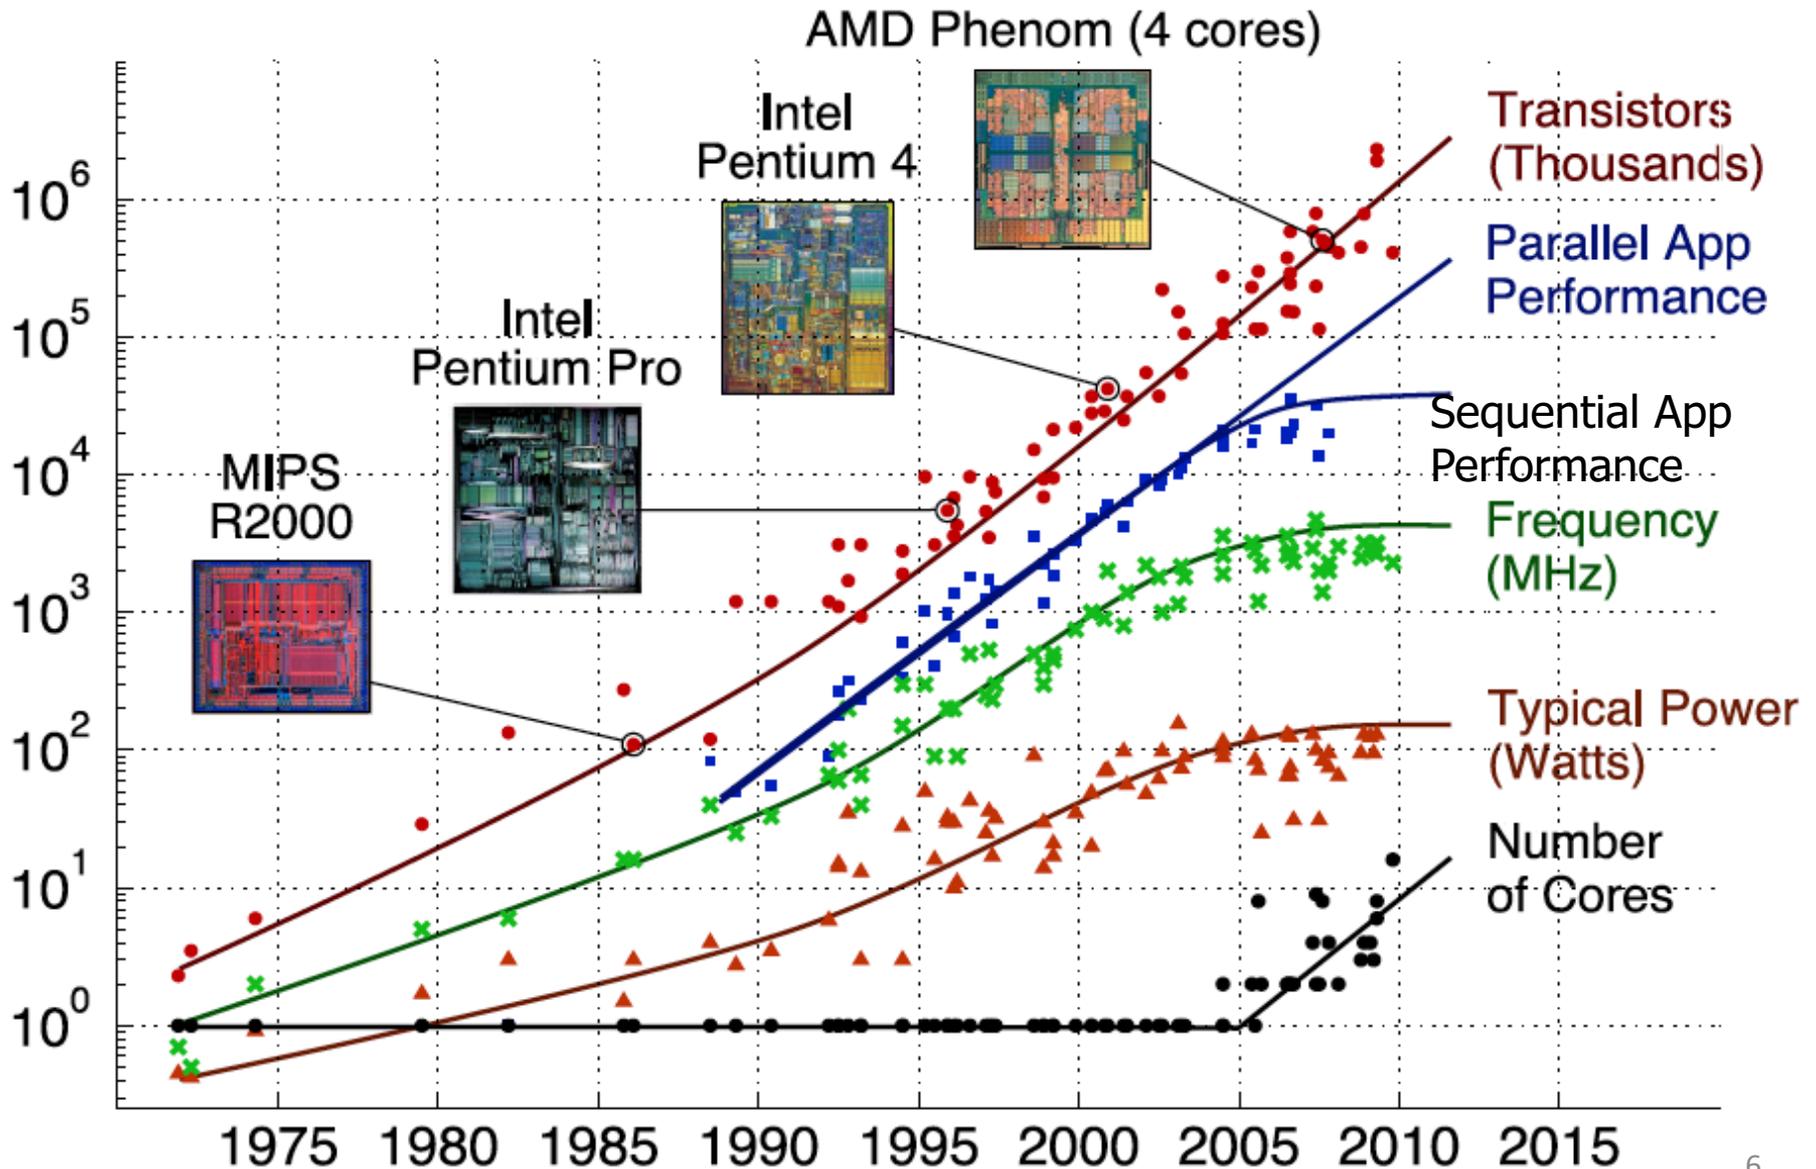

Data partially collected by M. Horowitz, F. Labonte, O. Shacham, K. Olukotun, L. Hammond

Parallelism the Only Path to Higher Performance

- Sequential processor performance not expected to increase much, and might go down
- If want apps with more capability, have to embrace parallel processing (SIMD and MIMD)
- In mobile systems, use multiple cores and GPUs
- In warehouse-scale computers, use multiple nodes, and all the MIMD/SIMD capability of each node

Multiprocessors and You

- Only path to performance is parallelism
 - Clock rates flat or declining
 - SIMD: 2X width every 3-4 years
 - 256b wide now, 512b Xeon Processors, 1024b in 2018?
 - MIMD: Add 2 cores every 2 years: 2, 4, 6, 8, 10, ...
- Key challenge is to craft parallel programs that have high performance on multiprocessors as the number of processors increase – i.e., that scale
 - Scheduling, load balancing, time for synchronization, overhead for communication
- Project 3: fastest code on 10-core computer (SIMD and MIMD!)

Threads

- *Thread*: a sequential flow of instructions that performs some task
- Each thread has a PC + processor registers and accesses the shared memory
- Each processor provides one (or more) *hardware* threads that actively execute instructions
- Operating system multiplexes multiple *software* threads onto the available hardware threads

Operating System Threads


Give the illusion of many active threads by time-multiplexing software threads onto hardware threads

- Remove a software thread from a hardware thread by interrupting its execution and saving its registers and PC into memory
 - Also if one thread is blocked waiting for network access or user input
- Can make a different software thread active by loading its registers into a hardware thread's registers and jumping to its saved PC

Hardware Multithreading

- Basic idea: Processor resources are expensive and should not be left idle
- Long memory latency to memory on cache miss?
- Hardware switches threads to bring in other useful work while waiting for cache miss
- Cost of thread context switch must be much less than cache miss latency
- Put in redundant hardware so don't have to save context on every thread switch:
 - PC, Registers
- Attractive for apps with abundant TLP
 - Commercial multi-user workloads

Hardware Multithreading (aka Hyperthreading)

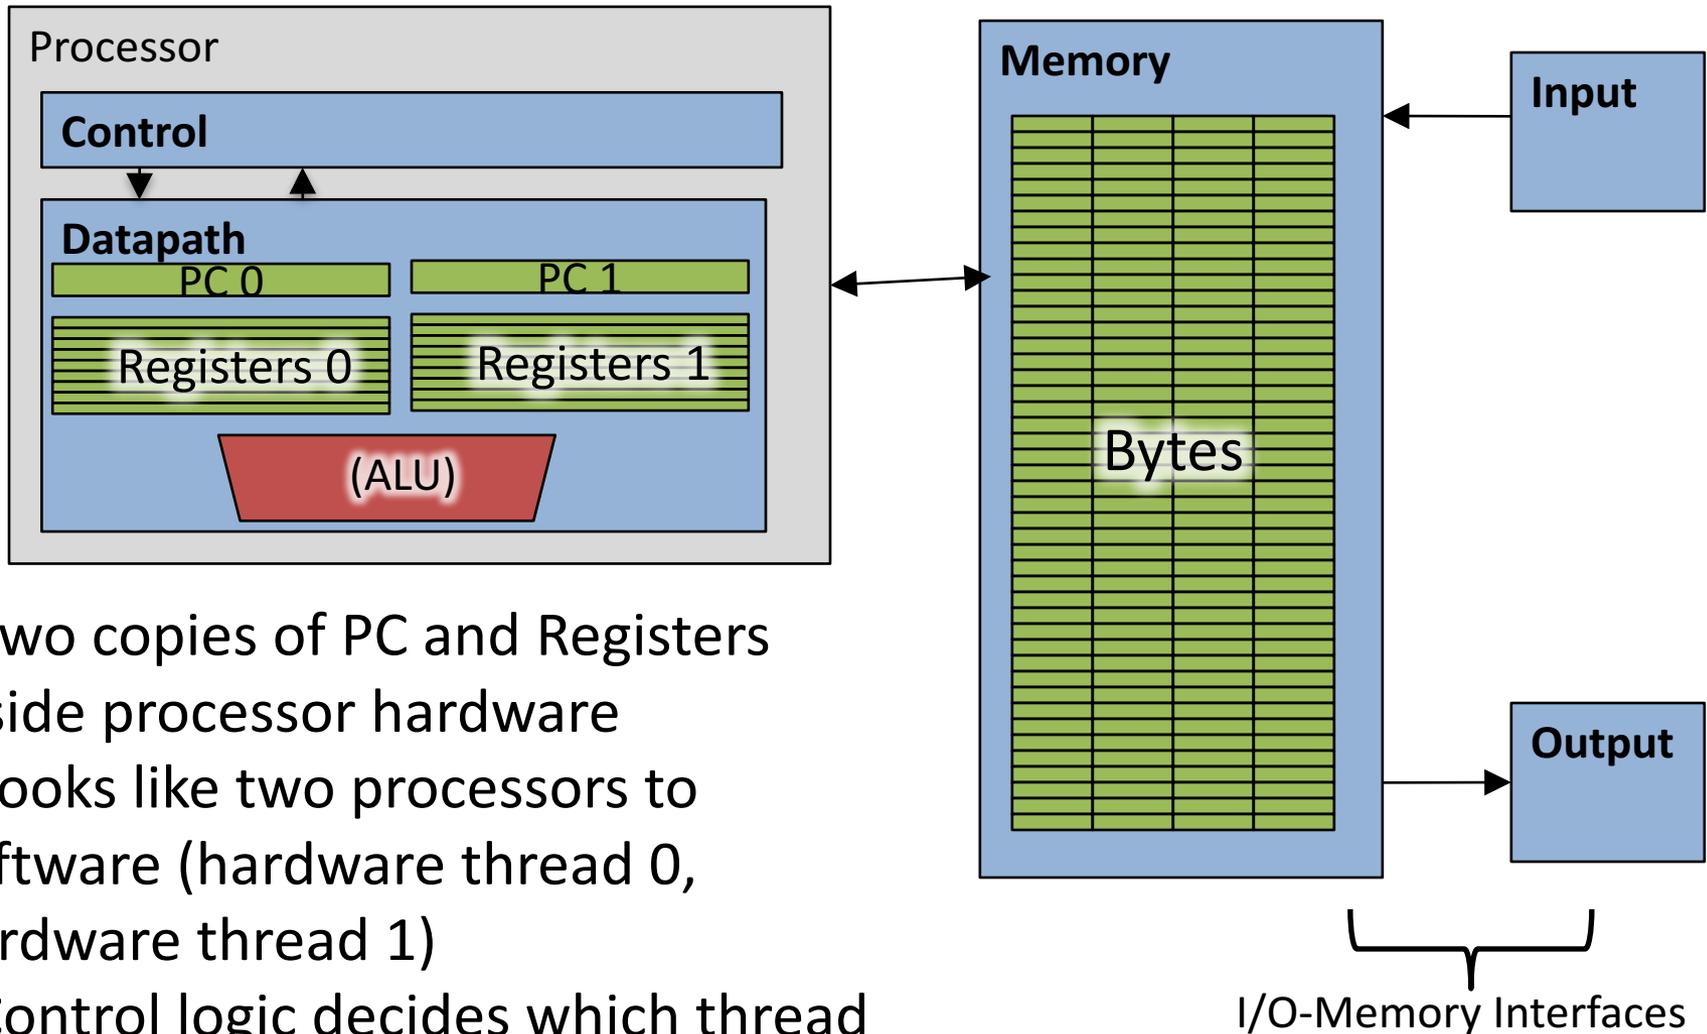

- Two copies of PC and Registers inside processor hardware
- Looks like two processors to software (hardware thread 0, hardware thread 1)
- Control logic decides which thread to execute an instruction from next

Multithreading vs. Multicore

- Multithreading => Better Utilization
 - $\approx 5\%$ more hardware, 1.10X better performance?
 - Share integer adders, floating-point units, all caches (L1 I\$, L1 D\$, L2\$, L3\$), Memory Controller
- Multicore => Duplicate Processors
 - $\approx 50\%$ more hardware, $\approx 2X$ better performance?
 - Share outer caches (L2\$, L3\$), Memory Controller
- Modern machines do both
 - Multiple cores with multiple threads per core

Sören's MacBook

- `sysctl -a | grep hw\.`

MacBookPro11,3

...

hw.physicalcpu: 4

hw.logicalcpu: 8

...

hw.cpufrequency =
2,800,000,000

hw.memsize = 17,179,869,184

hw.cachelinesize = 64

hw.l1icachesize: 32,768

hw.l1dcachesize: 32,768

hw.l2cachesize: 262,144

hw.l3cachesize: 6,291,456

on Linux:

`cat /proc/cpuinfo`

Sören's iPad Air 2

Apple A8X processor:

- 3 cores!
- L1 \$: 64KB data, 64KB instruction
- L2 \$: 2MB
- L3 \$: 4MB
- Max 1.5GHz clock
- 64bit ARM ISA
- 2 GB RAM

Comparison:

iPad Pro: A9X processor:

- Back to 2 cores...
- L1 \$: 64KB data, 64KB instruction
- L2 \$: 3MB
- No L3 \$: double memory bandwidth...
- 4 or 2 GB RAM

Admin

- HW 6 due on **Friday**, May 5 23:59:59 (May 6 12am on gradescope) –
- gradescope allows late submissions till May 9 (slip days)
- Upload your pdf yourself – stick to the template!
- HW 5 still needs some time – some students submitted “incorrect” number of pages – gradescope doesn’t support this...

100s of (Mostly Dead) Parallel Programming Languages

ActorScript	Concurrent Pascal	JoCaml	Orc
Ada	Concurrent ML	Join	Oz
Afnix	Concurrent Haskell	Java	Pict
Alef	Curry	Joule	Reia
Alice	CUDA	Joyce	SALSA
APL	E	LabVIEW	Scala
Axum	Eiffel	Limbo	SISAL
Chapel	Erlang	Linda	SR
Cilk	Fortran 90	MultiLisp	Stackless Python
Clean	Go	Modula-3	SuperPascal
Clojure	Io	Occam	VHDL
Concurrent C	Janus	occam- π	XC

OpenMP

- OpenMP is a language extension used for multi-threaded, shared-memory parallelism
 - Compiler Directives (inserted into source code)
 - Runtime Library Routines (called from your code)
 - Environment Variables (set in your shell)
- Portable
- Standardized
- Easy to compile: `cc -fopenmp name.c`

Shared Memory Model with Explicit Thread-based Parallelism


- Multiple threads in a shared memory environment, explicit programming model with full programmer control over parallelization
- **Pros:**
 - Takes advantage of shared memory, programmer need not worry (that much) about data placement
 - Compiler directives are simple and easy to use
 - Legacy serial code does not need to be rewritten
- **Cons:**
 - Code can only be run in shared memory environments
 - Compiler must support OpenMP (e.g. gcc 4.2)

OpenMP in CS110

- OpenMP is built on top of C, so you don't have to learn a whole new programming language
 - Make sure to add `#include <omp.h>`
 - Compile with flag: `gcc -fopenmp`
 - Mostly just a few lines of code to learn
- You will NOT become experts at OpenMP
 - Use slides as reference, will learn to use in lab
- **Key ideas:**
 - Shared vs. Private variables
 - OpenMP directives for parallelization, work sharing, synchronization

OpenMP Programming Model

- **Fork - Join Model:**

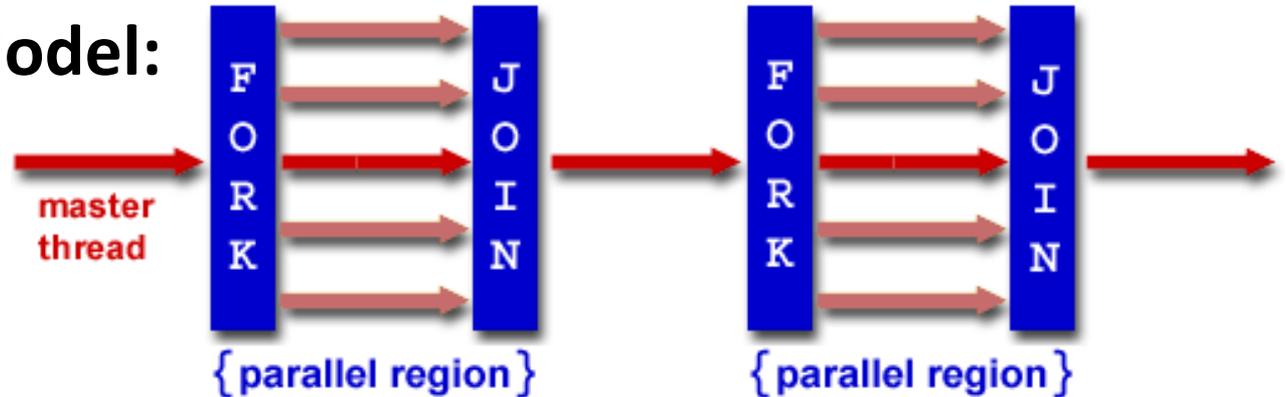

- OpenMP programs begin as single process (*master thread*) and executes sequentially until the first parallel region construct is encountered
 - *FORK*: Master thread then creates a team of parallel threads
 - Statements in program that are enclosed by the parallel region construct are executed in parallel among the various threads
 - *JOIN*: When the team threads complete the statements in the parallel region construct, they synchronize and terminate, leaving only the master thread

OpenMP Extends C with Pragmas

- *Pragmas* are a preprocessor mechanism C provides for language extensions
- Commonly implemented pragmas: structure packing, symbol aliasing, floating point exception modes (not covered)
- Good mechanism for OpenMP because compilers that don't recognize a pragma are supposed to ignore them
 - Runs on sequential computer even with embedded pragmas

parallel Pragma and Scope

- Basic OpenMP construct for parallelization:

```
#pragma omp parallel
```

```
{ ← This is annoying, but curly brace MUST go on separate  
  /* code goes here */  
}
```

line from #pragma

– *Each* thread runs a copy of code within the block

– Thread scheduling is *non-deterministic*

- OpenMP default is *shared* variables

– To make private, need to declare with pragma:

```
#pragma omp parallel private (x)
```

What Kind of Threads?

- OpenMP threads are operating system (software) threads.
- OS will multiplex requested OpenMP threads onto available hardware threads.
- Hopefully each gets a real hardware thread to run on, so no OS-level time-multiplexing.
- But other tasks on machine can also use hardware threads!

OMP_NUM_THREADS

- OpenMP intrinsic to set number of threads:

```
omp_set_num_threads(x);
```

- OpenMP intrinsic to get number of threads:

```
num_th = omp_get_num_threads();
```

- OpenMP intrinsic to get Thread ID number:

```
th_ID = omp_get_thread_num();
```

Parallel Hello World

```
#include <stdio.h>
#include <omp.h>
int main () {
    int nthreads, tid;

    /* Fork team of threads with private var tid */
    #pragma omp parallel private(tid)
    {
        tid = omp_get_thread_num(); /* get thread id */
        printf("Hello World from thread = %d\n", tid);

        /* Only master thread does this */
        if (tid == 0) {
            nthreads = omp_get_num_threads();
            printf("Number of threads = %d\n", nthreads);
        }
    } /* All threads join master and terminate */
}
```

Data Races and Synchronization

- Two memory accesses form a *data race* if from different threads to same location, and at least one is a write, and they occur one after another
- If there is a data race, result of program can vary depending on chance (which thread first?)
- Avoid data races by synchronizing writing and reading to get deterministic behavior
- Synchronization done by user-level routines that rely on hardware synchronization instructions
- (more later)

Analogy: Buying Milk

- Your fridge has no milk. You and your roommate will return from classes at some point and check the fridge
- Whoever gets home first will check the fridge, go and buy milk, and return
- What if the other person gets back while the first person is buying milk?
 - You've just bought twice as much milk as you need!
- It would've helped to have left a note...

Lock Synchronization (1/2)

- Use a “Lock” to grant access to a region (*critical section*) so that only one thread can operate at a time
 - Need all processors to be able to access the lock, so use a location in shared memory as *the lock*
- Processors read lock and either wait (if locked) or set lock and go into critical section
 - **0** means lock is free / open / unlocked / lock off
 - **1** means lock is set / closed / locked / lock on

Lock Synchronization (2/2)

- Pseudocode:

Check lock  Can loop/idle here
if locked

Set the lock

Critical section

(e.g. change shared variables)

Unset the lock

Possible Lock Implementation

- Lock (a.k.a. busy wait)

```
Get_lock:                # $s0 -> addr of lock
    addiu $t1,$zero,1    # t1 = Locked value
Loop:  lw $t0,0($s0)     # load lock
    bne $t0,$zero,Loop  # loop if locked
Lock:  sw $t1,0($s0)    # Unlocked, so lock
```

- Unlock

```
Unlock:
    sw $zero,0($s0)
```

- Any problems with this?

Possible Lock Problem

- Thread 1

```
    addiu $t1,$zero,1
Loop: lw $t0,0($s0)

    bne $t0,$zero,Loop

Lock: sw $t1,0($s0)
```

- Thread 2

```
    addiu $t1,$zero,1
Loop: lw $t0,0($s0)

    bne $t0,$zero,Loop

Lock: sw $t1,0($s0)
```



Time

*Both threads think they have set the lock!
Exclusive access not guaranteed!*

Hardware Synchronization

- Hardware support required to prevent an interloper (another thread) from changing the value
 - *Atomic* read/write memory operation
 - No other access to the location allowed between the read and write
- How best to implement in software?
 - Single instr? Atomic swap of register \leftrightarrow memory
 - Pair of instr? One for read, one for write

Synchronization in MIPS

- *Load linked:* `ll rt, off(rs)`
- *Store conditional:* `sc rt, off(rs)`
 - Returns **1** (success) if location has not changed since the `ll`
 - Returns **0** (failure) if location has changed
- Note that `sc` *clobbers* the register value being stored (`rt`)!
 - Need to have a copy elsewhere if you plan on repeating on failure or using value later

Synchronization in MIPS Example

- Atomic swap (to test/set lock variable)

Exchange contents of register and memory:


$\$s4 \leftrightarrow \text{Mem}(\$s1)$

```
try: add $t0,$zero,$s4 #copy value
      ll  $t1,0($s1)    #load linked
      sc  $t0,0($s1)    #store conditional
      beq $t0,$zero,try #loop if sc fails
      add $s4,$zero,$t1 #load value in $s4
```

sc would fail if another threads executes sc here


Test-and-Set

- In a single atomic operation:
 - *Test* to see if a memory location is set (contains a 1)
 - *Set* it (to 1) if it isn't (it contained a zero when tested)
 - Otherwise indicate that the Set failed, so the program can try again
 - While accessing, no other instruction can modify the memory location, including other Test-and-Set instructions
- Useful for implementing lock operations

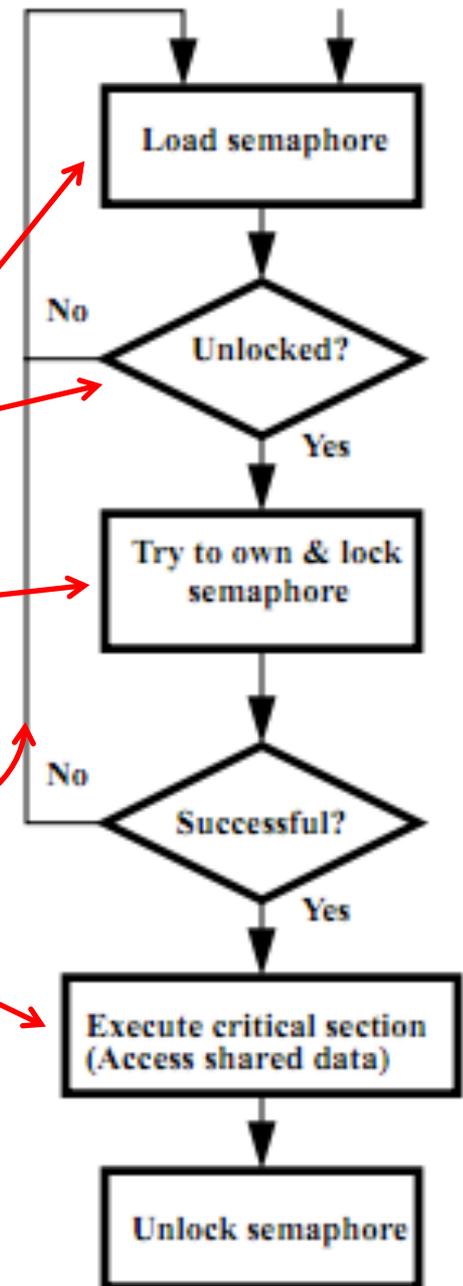

Test-and-Set in MIPS

- Example: MIPS sequence for implementing a T&S at (\$s1)

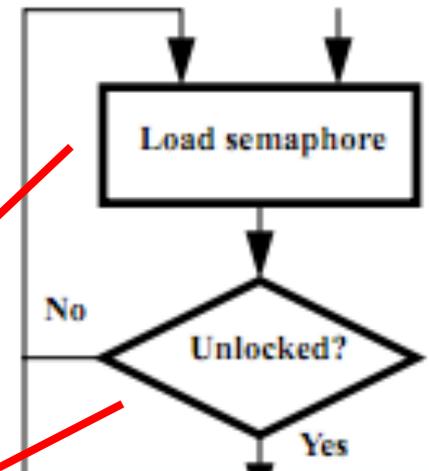

Idea is that not for programmers to use this directly, but as a tool for enabling implementation of parallel libraries

```
# critical section
```

Unlock:

```
sw $zero, 0($s1)
```

Execute critical section
(Access shared data)

Unlock semaphore

Question: Consider the following code when executed *concurrently* by two threads.

What possible values can result in $*(\$s0)$?

```
#      *($s0) = 100
lw     $t0, 0($s0)
addi   $t0, $t0, 1
sw     $t0, 0($s0)
```

A: 101 or 102

B: 100, 101, or 102

C: 100 or 101

D: 102

And in Conclusion, ...

- Sequential software is slow software
 - SIMD and MIMD only path to higher performance
- Multithreading increases utilization, Multicore more processors (MIMD)
- OpenMP as simple parallel extension to C
 - Threads, Parallel for, private, critical sections, ...
 - \approx C: small so easy to learn, but not very high level and it's easy to get into trouble